

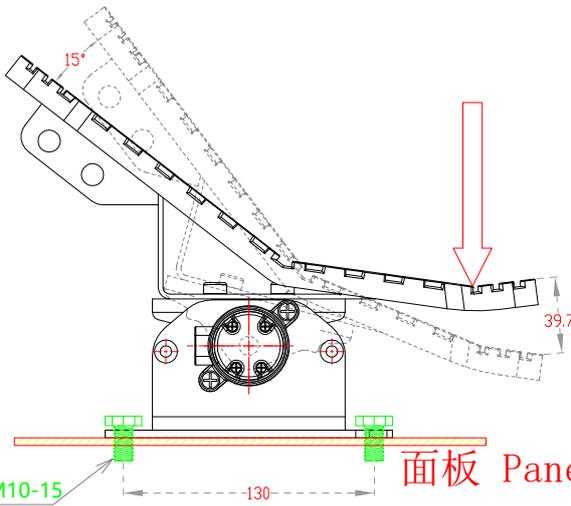
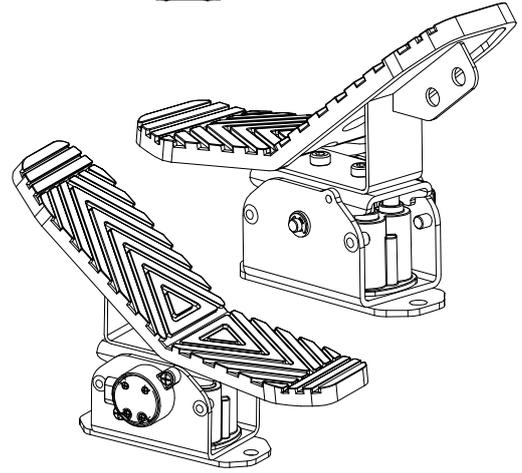
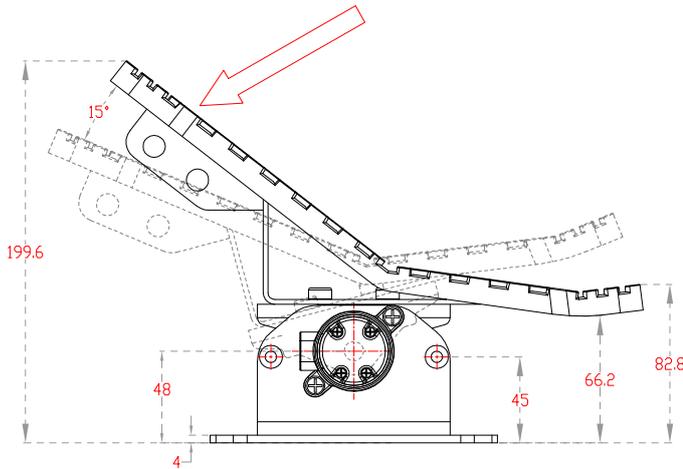
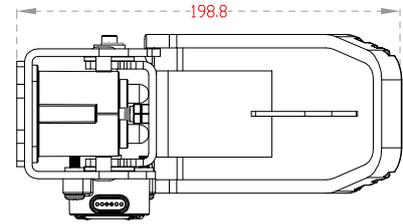
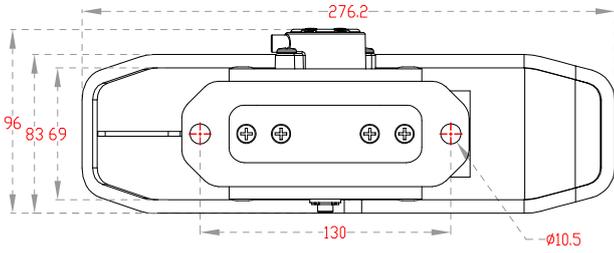
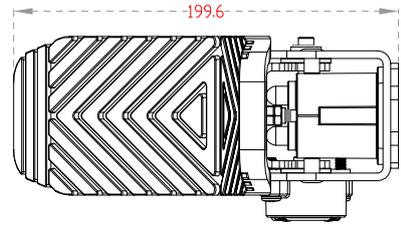
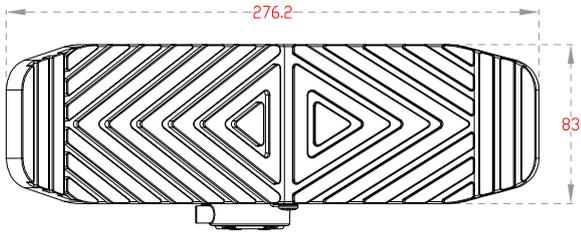



A2			
A1			
记号:	变更原因	签认	日期

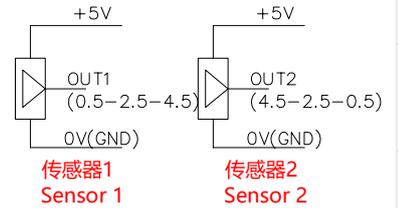

面板 Panel



1. 传感器1 0V (Sensor1 0V)
2. 传感器1 Out (Sensor1 Out)
3. 传感器1 5V (Sensor1 5V)
4. 传感器2 5V (Sensor2 5V)
5. 传感器2 Out (Sensor2 Out)
6. 传感器2 0V (Sensor2 0V)



DTM-06 (公头 Male)

履带车油门踏板
双向油门踏板
弹簧自动回中位
机械角度: ±15度
供电: DC5±0.5V
信号输出: 双路交插信号输出
0.5-2.5-4.5V (中位2.5V)
功率: 32mA/@5V
防护: IP66
引线长度: 30CM线束带德驰连接器DTM06-6P

Tracked vehicle accelerator pedal
Two-way accelerator pedal
spring return
Mechanical angle: ±15 degrees
Power supply: DC5±0.5V
Signal output: dual interleaved signal output
0.5-2.5-4.5V (Center 2.5V)
Power: 32mA/@5V
Protection: IP66
Cable Length: 30CM Cable with DEUTSCH Connector
DTM06-6P

MKF-AP-01 Accelerator Pedal

Drawn By:	1	2	Scale: 1:1	View:
Designed by:	1	2	Stages	Unit: mm
Audit	1	2		
Approved:	1	2	1 of 1 page	