



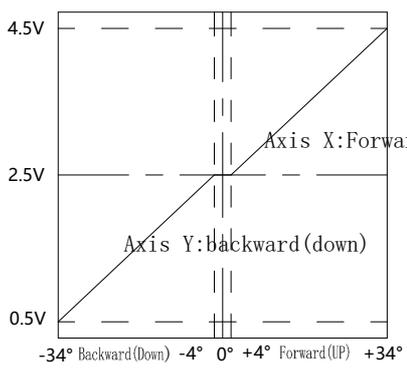
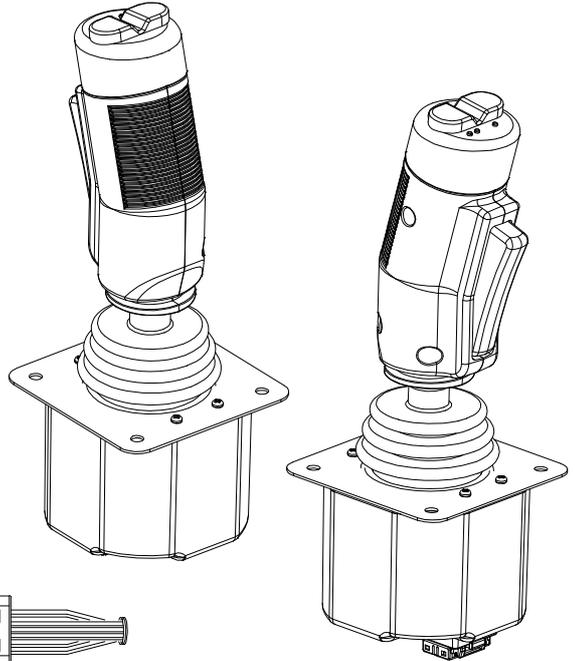




(A2)				
(A1)				
记号:	变更原因	签认	日期	

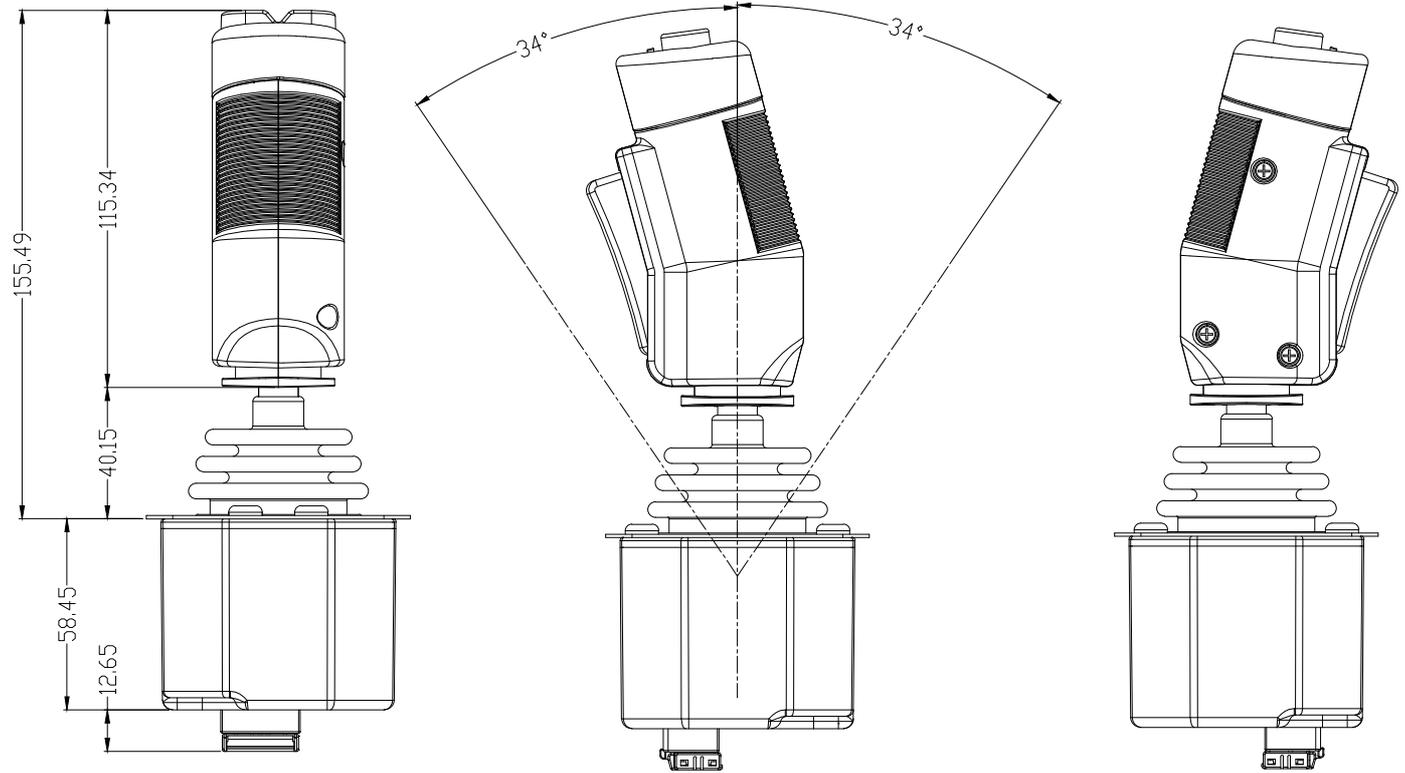

Technical parameters:  
 1 Axis forward and backward  
 Friction brake, center vibration feel  
 Friction adjustable  
 Grip top with left and right 2 buttons  
 Operating angle:  $\pm 34^\circ$   
 Power supply: DC5V  $\pm$  0.5V  
 Power consumption: 20mA  
 Contact capacity of switch: 1A/30V  
 Protection: IP67 above the panel  
 Life span: more than 1 million times

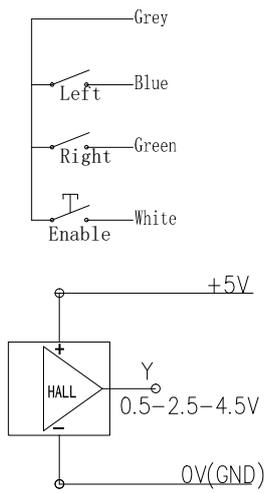

- Wiring definition**
1. Power+5V
  2. Power 0V
  3. Y signal (0.5-2.5-4.5V)
  4. Blank
  5. Switch left of grip top (blue)
  6. Switch right of grip top (blue)
  7. Enable switch
  8. Switch common

Model No. : MKF-JS35-G

<b>Mate Technology Shenzhen Limited</b>				
<a href="http://www.matend.com">www.matend.com</a>				
绘图:	1	2	Scale: 1:1	View:
设计:	1	2	阶段标记	Unit: mm
审核:	1	2		
批准:	1	2	第 1 页 共 1 页	