
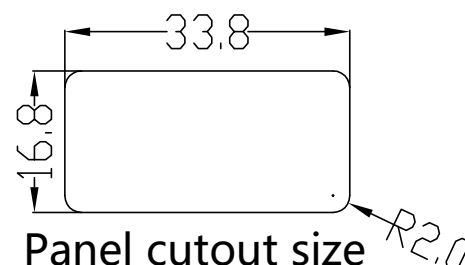
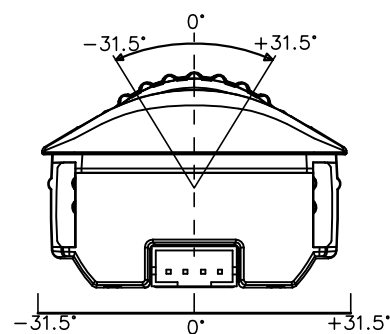

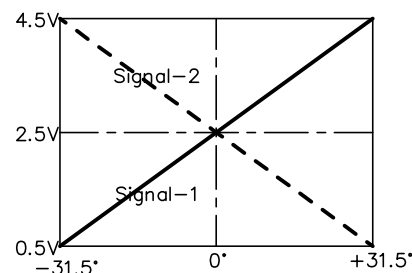

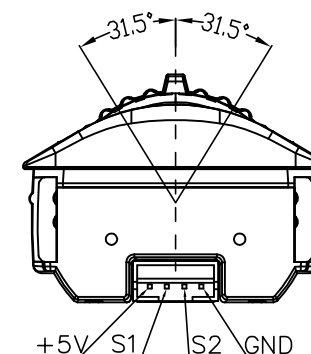

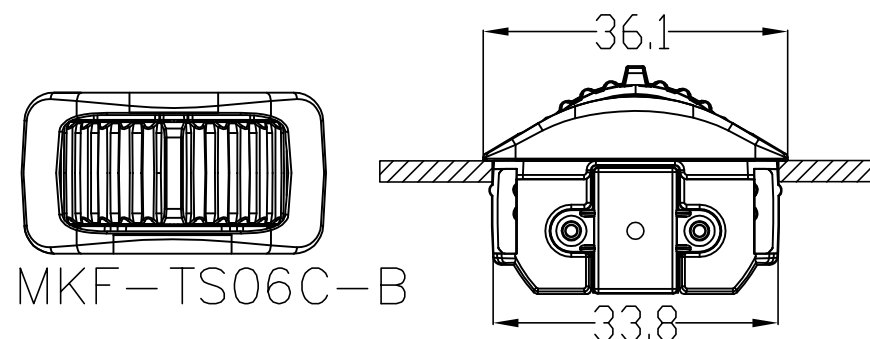

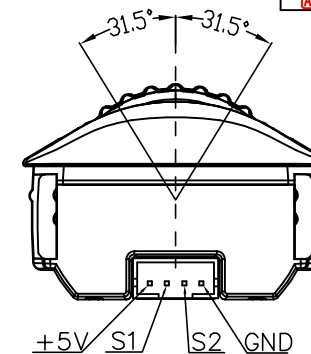
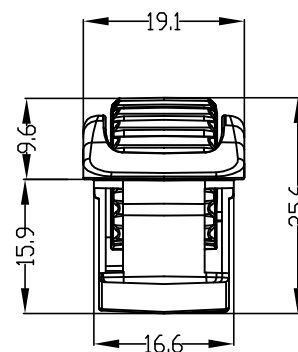


记号:	变更原因	签认	日期
(A1)			
(A2)			

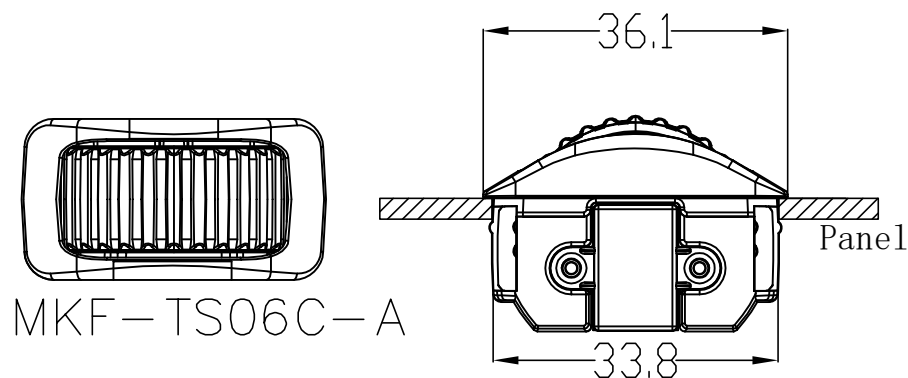

Hall sensor: Dual hall sensor
Wok Temp.: -40°C~+85°C
Life span: 3 million Cycles
Power supply: DC5V±0.5V
Max current: 10mA
Max Load: 5mA/1k resistance

Model No.: MKF-TS06C-A
MKF-TS06C-B

Connector 2.0-4P
1. Red/+5V
2. Yellow/Signal1
3. Green/Signal2
4. Black/GND

Mate Technology Shenzhen limited					
www.matend.com					
Draw:	1	2	Scale:	1:1	View:
Design:	1	2	Stage	Unit:	mm
Audit:	1	2			
Approve:	1	2	第 1 页 共 1 页		