




A2			
A1			
记号:	变更原因	签认	日期

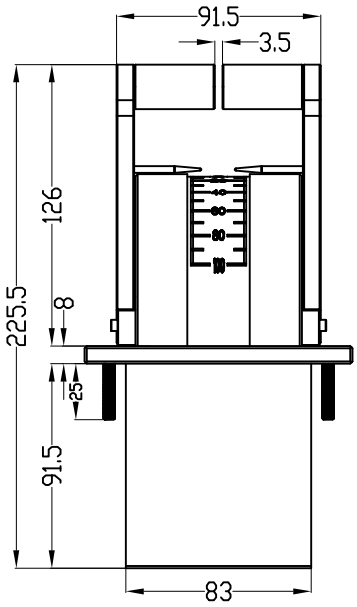

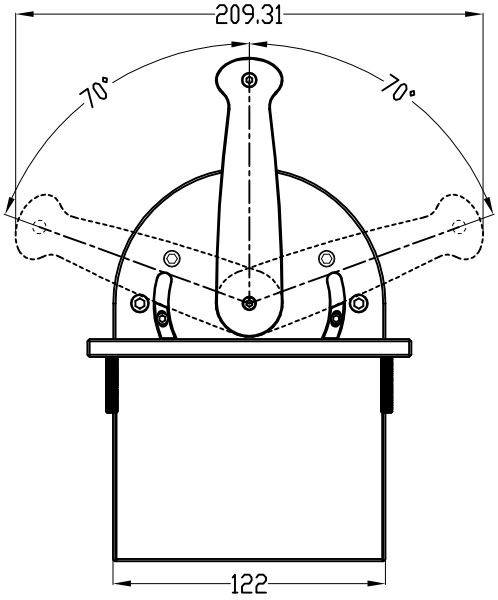

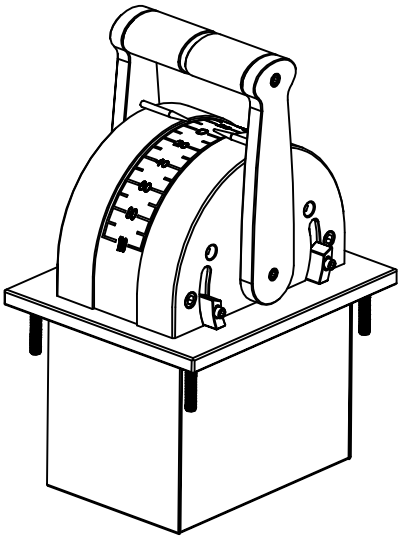

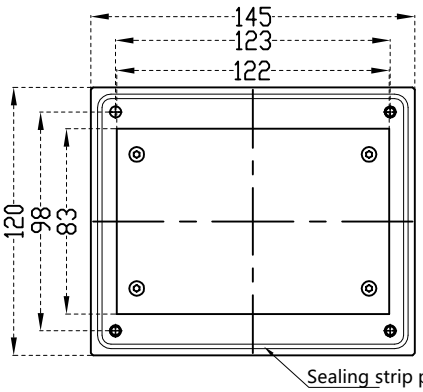

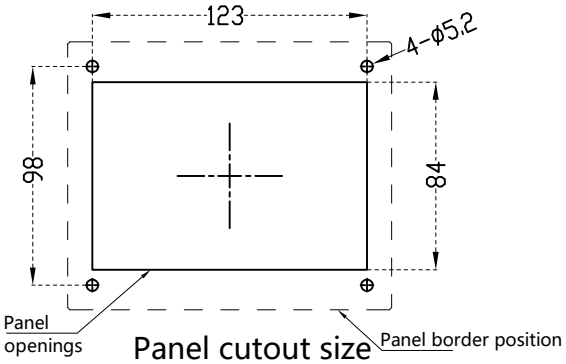

Panel cutout size

MKF-JS72 dual engine throttle controller. Suitable for ship engine throttle control, capable of controlling 2 engines, with throttle control and gear control functions. There are 11 mechanical gears (5 gears in the front and 5 gears in the back), and the PVC scale is adjustable for backlighting. Using Hall sensors, with linear compensation across the entire temperature range, the left and right signal outputs are completely isolated from the RS485 signal; Linear surface emitting technology, with adjustable backlight brightness.

Aluminum alloy shell, anodized surface, using nano friction positioning material, with good hand feel.

1、 Features:

Operating angle: 140 ° (± 70 °)

Gear: 11th gear (5th gear forward, 5th gear backward, 1st gear in the middle)

Each gear has a graduated feel

Synchronous control: dual servo stepper motor and electromagnetic clutch mechanism


Equipped with remote synchronization control function

Signal output: Current 4-20mA+RS485


Power supply: DC24V (DC10V/DC36V)

Operating temperature: -40 ℃~+70 ℃

Protection: IP67 above the panel



Left rudder signal output



Right rudder signal output

Model No.: MKF-JS72

绘图:	1	20231226	Scale: 1:1	View:	
设计:	1	2	Stage	Unit:	mm
审核:	1	2			
批准	1	2	第 2 页	共 2 页	